



Aeris Swopper

Product information
Product dimensions
Tender text
TÜV-GS certificate
LGA pollutant test certificate
Care instructions
Fabric sample overview

Aeris Swopper

Product information



Product information

Any more active and it
would no longer be sitting.



Aeris Swopper Product information

Aeris Swopper

The Aeris Swopper is the pioneer among active chairs. As the first office chair with three-dimensional movement, it has revolutionised the way people work. Its innovative technology automatically keeps the sitter in motion, which strengthens the back. This is not only fun and energising, but also effectively prevents back pain. The wide base and the joint close to the floor ensure a secure hold and 360° mobility. Its striking design makes the Aeris Swopper an absolute eye-catcher in modern office spaces.



Product information



Aeris 3D technology enables movement in all three dimensions: forwards, to the sides, backwards and - unique to Aeris - upwards and downwards. The so-called vertical swinging relieves the intervertebral discs, makes it easier to stand up, promotes blood circulation and gets the circulation going. The convex moulded seat also promotes an upright posture and prevents the seat edges from pinching.

Aeris Swopper

Product information

Aeris Swopper

Technical Data:

Product weight

11 kg without backrest, 17 kg with backrest

Footring

Die-cast aluminium, powder coated,
diameter: 55 cm without castors, 58 cm with
castors

max. user weight

120 kg

Seat

Seat support: plastic, upholstery: PU
foam,diameter: 43 cm

Castor types

Soft floor castors, hard floor castors according
to DIN EN 12529

Swopper Air

Breathable, pressure-regulating high-tech
cushioning with five functional layers

Swopper Work

Swopper plus backrest including castors
fulfilling DIN EN 1335

Product information

How to choose the right spring:

Light

Body weight under 50 kg

Standard

This spring suits almost everyone

High

Height over 185 cm

Low

Table is lower than 65 cm

Awards and Certifications:



Aeris Swopper

Product dimensions

Aeris Swopper

Dimensions

Overall height
52 cm - 66 cm (unloaded)



Overall depth
59 cm

Overall width
59 cm

Seat height - Standard
45 cm - 59 cm (loaded)

Seat width
41 cm

Seat depth
41 cm

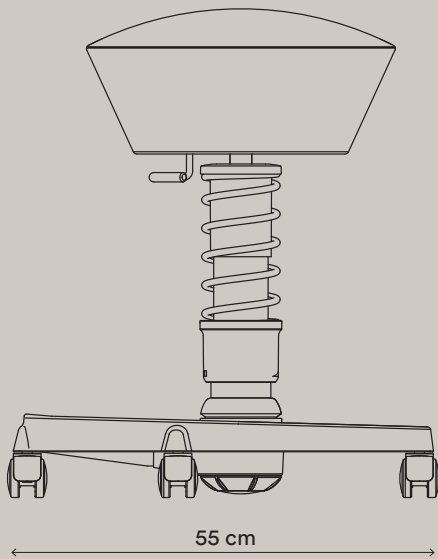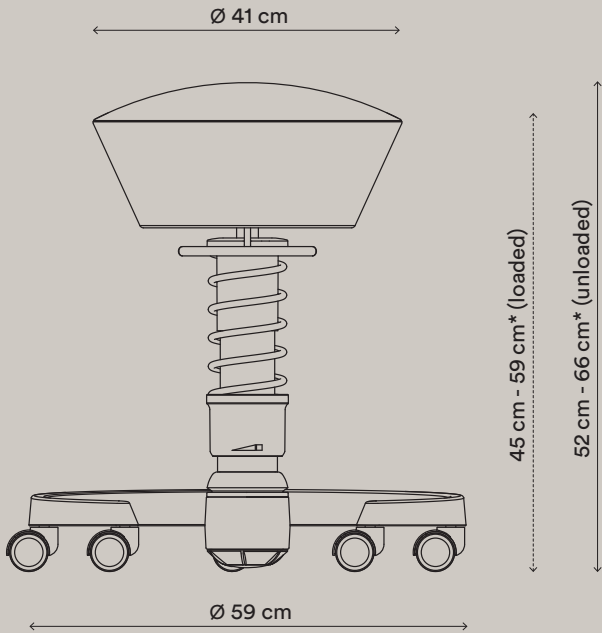


Product dimensions

Spring strut type

Low
Seat height loaded 42 cm - 56 cm,
Overall height unloaded 50 cm - 64 cm

Standard*
Seat height loaded 45 cm - 59 cm,
Overall height unloaded 52 cm - 66 cm

High
Seat height loaded 49 cm - 69 cm,
Overall height unloaded 56 cm - 76 cm

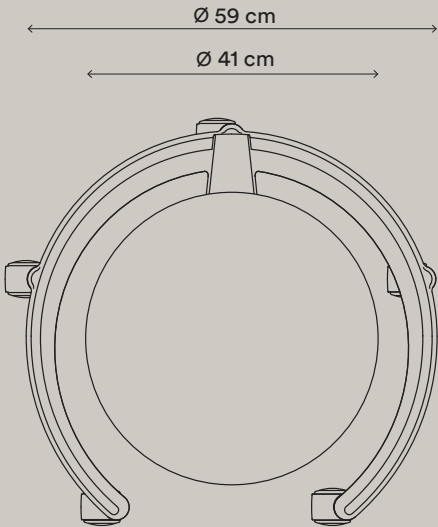



Aeris Swopper

Product dimensions

Aeris Swopper

Dimensions


- Overall height
52 cm - 66 cm (unloaded)
- Overall depth
55 cm
- Overall width
55 cm
- Seat height - Standard
45 cm - 59 cm (loaded)
- Seat width
41 cm
- Seat depth
41 cm

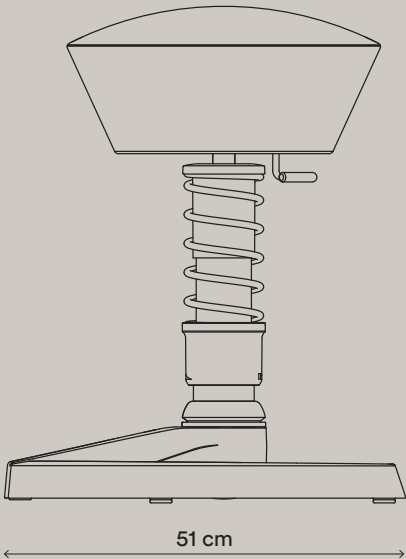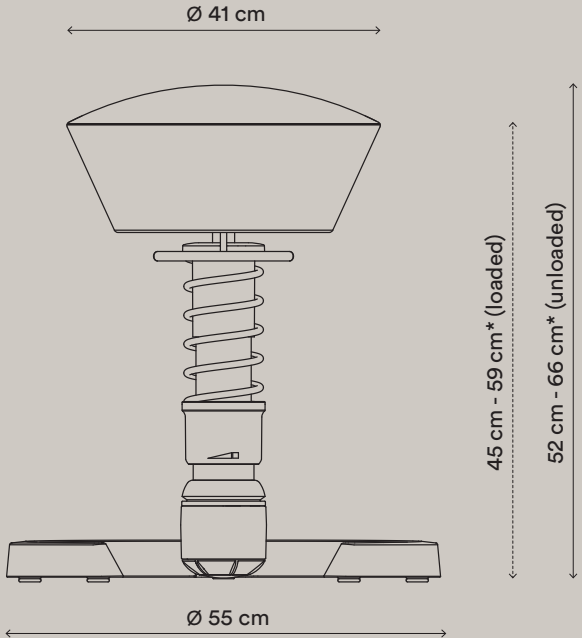

Product dimensions

Spring strut type

- Low
Seat height loaded 42 cm - 56 cm,
Overall height unloaded 50 cm - 64 cm
- Standard*
Seat height loaded 45 cm - 59 cm,
Overall height unloaded 52 cm - 66 cm
- High
Seat height loaded 49 cm - 69 cm,
Overall height unloaded 56 cm - 76 cm

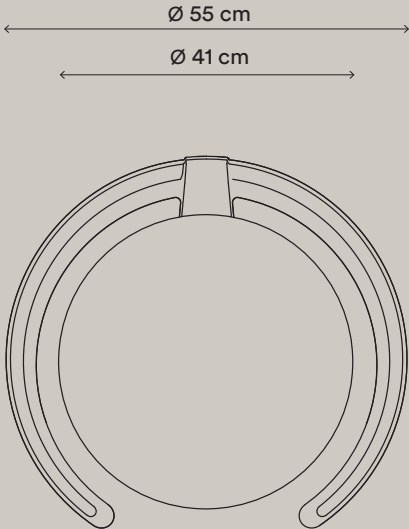

Product type

3D active office swivel chair,
without backrest



Product description

The Aeris Swopper is an ergonomic chair with innovative 3D technology. This technology allows the chair to swing vertically to all sides. The lateral flexibility extends the reach and ensures an optimum posture in relation to the work surface. This keeps muscles, intervertebral discs, tendons and joints fit. Vertical swaying relieves pressure on the intervertebral discs, makes it easier to stand up, promotes blood circulation and gets the circulation going. The Aeris Swopper has a convex seat, which promotes an upright posture and blood circulation, and avoids pressing seat edges. The stable foot ring is extremely tilt-resistant and stable, available with or without castors. The vertical swing can be adjusted to all users from 50 - 120 kg (standard suspension leg) and 35 - 50 kg (light suspension leg), and the horizontal flexibility can also be adjusted in terms of resistance. The seat can be rotated through 360°, allowing the user to sit down from any direction.

Aeris Swopper
TÜV-GS certificate

Aeris Swopper

TÜV-GS certificate Standard

Zertifikat

Certificate

TÜVRheinland®

Zertifikat Nr. Certificate No.

R 60112562

Blatt Page

0001

Ihr Zeichen	Client Reference	Unser Zeichen	Our Reference	Ausstellungsdatum	Date of Issue
		0010--21255148	001	03.08.2016	(day/mo/yr)

Genehmigungsinhaber License Holder

aeris GmbH
Hans-Stießberger-Str. 2 a // 3. OG
85540 Haar
Deutschland

Fertigungsstätte Manufacturing Plant

aeris GmbH
Von-Holzapfel-Str. 6
86497 Horgau
Deutschland

Prüfzeichen Test Mark

TÜVRheinland®

ZERTIFIZIERT

www.tuv.com

ID: 1111210239

Bauart geprüft

Sicherheit

Regelmäßige

Produktions-

überwachung

Geprüft nach Tested acc. to

ANSI/BIFMA X5.1-2011

Zertifiziertes Produkt (Geräteidentifikation)

Certified Product (Product Identification)

Lizenzentgelte - Einheit

License Fee - Unit

Bürostuhl

Modell: swopper

Bestehend aus:

- Fußring mit Gleitern oder optional mit 5 lastabhängig gebremsten Lenkdoppelrollen, Bezeichnung der Rollen: MOVE 50-36
- Federbein mit Gasdruckfeder
- Sitz gepolstert und mit Stoff überzogen

Einstellmöglichkeiten:

- Höhe der Sitzfläche mittels Gasfeder von KGS; Bezeichnung der Gasfeder: KGL DIN 4550-3
- Einstellung der seitlichen Flexibilität
- Einstellung der vertikalen Federung

Abmessungen (H x B x T): 698 mm x 569 mm x 530 mm, 10,55 kg

5

Dem Zertifikat liegt unsere Prüf- und Zertifizierungsordnung zugrunde und es bestätigt die Konformität des Produktes mit den oben genannten Standards und Prüfgrundlagen. Zusätzliche Anforderungen in Ländern, in denen das Produkt in Verkehr gebracht werden soll, müssen zusätzlich betrachtet werden. Die Herstellung des zertifizierten Produktes wird überwacht.

This certificate is based on our Testing and Certification Regulation and states the conformity of the product with the standards and testing requirements as indicated above. Any additional requirements in countries where the product is going to be marketed have to be considered additionally. The manufacturing of the certified product is subject to surveillance.

TÜV Rheinland LGA Products GmbH, Tillystraße 2, 90431 Nürnberg

Tel.: +49 221 806-1371 e-mail: cert-validity@de.tuv.com

Fax: +49 221 806-3935 http://www.tuv.com/safety

Zertifizierungsstelle

A.H.

Andre Henning

TÜV Rheinland LGA Products GmbH

TÜVRheinland®

Zertifizierungsstelle



Aeris Swopper
LGA pollutant test
certificate

Aeris Swopper

LGA pollutant test certificate

Zertifikat

Certificate

TÜVRheinland

®

Zertifikat Nr. Certificate No.

TX 60156618

Blatt Blatt

0001

Ihr Zeichen Client Reference

Unser Zeichen Our Reference

Längstens gültig bis Latest expiration date

0010--60442052

001

01.09.2026

Latest expiration date

(day/mo/yr)

Genehmigungsinhaber License Holder

Fertigungsstätte Manufacturing Plant

aeris GmbH

aeris GmbH

Hans-Stießberger-Str. 2 a // 3. OG

Von-Holzapfel-Str. 6

85540 Haar

86497 Horgau

Deutschland

Deutschland

Prüfzeichen Test Mark

Geprüft nach Tested acc. to

TÜVRheinland

®

ZERTIFIZIERT

Emissionsgeprüft

Schadstoffgeprüft

Regelmäßige

Produkt-

Überwachung

www.tuv.com

ID 1111239867

2 PIG S 0121/02.19

Schadstoffprüfung gemäß Kriterienkatalog "TÜV Rheinland certified", Produktgruppe

"Sitz- und Liegemöbel"

Zertifiziertes Produkt (Geräteidentifikation)

Certified Product (Product Identification)

Stuhl / Bürostuhl / Hocker / Stehhilfe / Kinderstuhl

3D-Aktiv-Bürodrehstuhl: Swopper / Swopper mit Lehne (WORK)

Fußring (Aluminiumdruckguss, pulverbeschichtet) mit Rollen,

Federbein mit Gasdruckfeder, Sitzträger aus Kunststoff mit

PU-Formschaumpolsterung und Stoffbezug; Swopper WORK mit

Rückenlehne aus Kunststoff am Fußring montiert optional mit

Stoffbezug.

Aktiv-Steh-Sitz: Muvman / Muvman Industry

Fußsteller aus Kunststoff, glasfaserverstärkt, Mittelsäule

mit Gasdruckfeder, Sitzträger aus Kunststoff mit PU-Schaum

gepolstert und Stoffbezug; Muvman Industry Standfuß aus

Aluminiumdruckguss, pulverbeschichtet schwarz mit

Universalgleitern, Sitz mit Integralschaum in schwarz.

Aktiv-Kinder-Drehstuhl: Swoppster

Fußring (Kunststoff, glasfaserverstärkt) mit

Rollen/Standfüßen, Federbein mit Gasdruckfeder, Sitzträger

aus Kunststoff mit PU-Schaumpolsterung und Stoffbezug.

Ausgewählte textile Bezugsstoffe der aeris Kollektion.

Dem Zertifikat liegt unsere Prüf- und Zertifizierungsordnung zugrunde.

Zertifizierungsstelle

TÜVRheinland LGA Products GmbH

®

TÜVRheinland

Zertifizierungsstelle

Dr. J. Galinkina

TÜV Rheinland LGA Products GmbH, Tillystraße 2, 90431 Nürnberg

Tel.: +49 221 806-1371 e-mail: cert-validity@de.tuv.com

Fax: +49 221 806-3935 http://www.tuv.com/safety

Ausstellungsdatum Date of Issue : 02.09.2021

(day/mo/yr)

1002019_04.08 © TÜV, TÜV and TÜV are registered trademarks. Utilisation and application requires prior approval.

Microfibre cover

Optimum care is ensured by using water and pH neutral soapsuds. Stains containing oil and fat should be treated beforehand with ethyl alcohol.

After each cleaning action you should rinse with clear water. Never use chlorinated detergents.

The seat must only be treated damp, not wet, otherwise the materials used under the fabric may be damaged. Therefore, please use only a little bit of water and apply only small amounts of the cleaning detergents.

To avoid edges, please always treat from the edge to the middle.

Wool blend cover

The cover should ideally only be vacuumed gently at regular intervals using a soft vacuum nozzle. Always remove stains as quickly as possible.

Most types of stains can be easily removed with lukewarm water, possibly with the addition of a pH-neutral cleaning agent. Always use a clean, white cotton cloth for this.

Please press a dry kitchen towel or colorless kitchen paper against the fabric so that moisture and dirt can be absorbed.

Mesh fabric cover (Air: multi-layer construction)

Most types of stains can be easily removed with lukewarm water, possibly with the addition of a pH-neutral detergent. Always use a clean, white cotton cloth for this.

Treat with clear water after each cleaning. Never use cleaning agents containing chlorine.

The seat may only be treated when damp, not wet, as otherwise the upholstery under the fabric may be damaged. Therefore, please only use a small amount of water and only use small amounts of cleaning agent.

Artificial leather Uruguay cover

Wipe with a damp cloth, if necessary use a liquid cleaning agent containing 50 % water and 50 % alcohol.

Aeris Swopper Care instructions

Aeris Swopper

Care instructions

Leather cover

Wipe with a soft, damp cloth without detergent, then rub over a large area with a clean cloth.

If necessary, treat with leather care product.

Cleaning the foot ring

The best way to remove scuff marks from shoe soles is with a soft eraser or a soft cloth with white spirit.

Aeris Swopper

Fabric sample overview

Aeris Swopper

Fabric sample overview

Capture / Gabriel



CP01, black melange 5501	CP05, green melange 5301	CP22, stone grey melange 4102	CP24, slate grey melange 4601	CP26, pigeon blue melange 4902
CP28, petrol blue melange 5001	CP29, dark red melange 5402	CP30, orange-red melange 4301	CP31, pink-red melange 4802	CP35, green-beige melange 5101

Aeris Swopper

Fabric sample overview

Aeris Swopper

Fabric sample overview

Select / Gabriel




SE01, black
60999



SE02, grey
60130




SE03, red
64089



SE04, blue
66071




SE05, green
67095




SE07, slate grey
60134




SE10, pastel blue
67098




SE11, azure blue
66192



SE15, pale pink
65117



SE19, turquoise
67100




Aeris Swopper

Fabric sample overview

Aeris Swopper

Cura / Gabriel

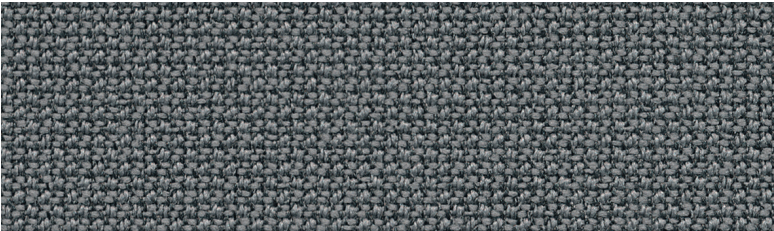

Fabric sample overview

<div>CU01, black</div> <div>60111</div> <div></div>	<div>CU02, grey melange</div> <div>60110</div> <div></div>	<div>CU04, blue melange</div> <div>66167</div> <div></div>	<div>CU06, yellow melange</div> <div>62084</div> <div></div>	<div>CU09, light violet melange</div> <div>64194</div> <div></div>
<div>CU12, petrol blue melange</div> <div>67084</div> <div></div>	<div>CU13, pale green melange</div> <div>68186</div> <div></div>	<div>CU14, fern green melange</div> <div>68181</div> <div></div>	<div>CU16, beige melange</div> <div>61168</div> <div></div>	<div>CU17, light grey melange</div> <div>60112</div> <div></div>

Aeris Swopper


Fabric sample overview

Aeris Swopper

Comfort / Gabriel




Runner / Gabriel

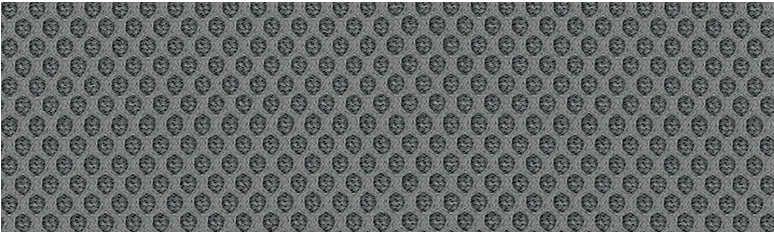

Luna / Gabriel



Atlantic / Heller-Leder

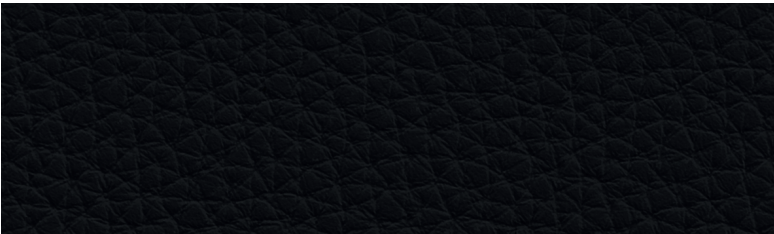

Fabric sample overview

CM01, black
0050




CM02, grey
1012




CM03, red
1414



CM04, blue
66004



CM05, green
8397




RN01, black
60999




RN02, grey
60011




RN03, red
64119



RN04, blue
66123



RN05, green
68110



LA01, black
35002 999



UR01, black
13-901




Gabriel Capture features

The use of lightly felted, multicolored wool in this material gives it a unique and appealing texture. The sophisticated melange pattern creates a fascinating look that immediately catches the eye. But not just visually, the feel of this material is also impressive across the board. The wool is incredibly soft and comfortable, which guarantees a pleasant and cozy sitting or reclining experience.

The outstanding wear resistance of this material guarantees a long service life and maintains its aesthetics even with regular use and stress. This makes it a durable choice that can withstand the high demands of daily use.

Finally, the Capture wool cover meets the demanding requirements of the furniture industry, which further underlines its quality and performance. It is therefore a reliable option that meets the standards of the furniture industry.

Capture-Specifications

Design no.	2472		
Composition	85% New Zealand wool / 15% polyamide		
Weight	g/lm 475 oz/lin.yd 15.32		
Width	cm 140 inches 55		
Abrasion	rubs martindale (EN ISO 12947-2) 200.000 rubs martindale (ASTM D4966) (heavy duty upholstery) 200.000 ASTM D4966 Martindale (heavy duty) pass		
	Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan		
Pilling	scale 1-5, max. 5 – EN ISO 12945-2 ASTM D4970 Pilling pass	4-5	
Light fastness	scale 1-8, max. 8 – EN ISO 105-B02 AATCC 16 Light fastness pass	5-7	
Rubbing fastness	scale 1-5, max. 5 – EN ISO 105x12 (dry/wet)	4-5/4-5	
Care instructions	dry cleaning P(S) 		
Flammability	BS EN 1021 1&2 Cigarette and Match BS 5852 Part 1 O,1 Cigarette & Match, The Furniture and Furnishing Regulations 1988 Class Uno UNI 9175 Class 1 I EMME CA TB 117-2013 ASTM E 84 Class 1 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.		
Environment	OEKO-TEX® STANDARD 100 EU Ecolabel		

Gabriel Select features

This impressive material boasts an elegant simplicity that is accompanied by an allround user-friendly design. With an extensive full spectrum color palette, it offers an almost endless variety of possibilities for design, making it fits perfectly with a wide variety of furnishing styles.

Thanks to its superior abrasion resistance, measured by an impressive 200,000 Martindale cycles, this material is extremely durable and resistant, even in heavy-duty environments. It is therefore an ideal choice for Highly frequented rooms such as public areas, offices or restaurants that require a durable solution.

The environmental friendliness of these materials is confirmed by the EU Ecolabel, which makes its production sustainable and environmentally friendly. It also fulfills the STANDARD 100 of OEKO-TEX®, which means that it has been tested for possible harmfulsubstances is considered safe for human use.

Select-Specifications

Design no.	2498		
Composition	85% New Zealand wool / 15% polyamide		
Weight	g/lm 510 oz/lin.yd 16.45		
Width	cm 140 inches 55		
Abrasion	rubs martindale (EN ISO 12947-2) 200.000 ASTM D4966 Martindale (heavy duty) rubs martindale (ASTM D4966) (heavy duty upholstery) 100.000		
	Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan		
Pilling	scale 1-5, max. 5 – EN ISO 12945-2 ASTM D4970 Pilling pass	4	
Light fastness	scale 1-8, max. 8 – EN ISO 105-B02 AATCC 16 Light fastness pass	5-8	
Rubbing fastness	scale 1-5, max. 5 – EN ISO 105x12 (dry/wet) AATCC 8 or 116 Dry/wet crocking	4-5/4-5 pass	
Care instructions	dry cleaning P(S) 		
Flammability	BS EN 1021-1 Cigarette BS EN 1021-2 Match BS 5852 Part 1 O,1 Cigarette & Match, The Furniture and Furnishing Regulations 1988 BS 5852 Crib 5 IMO MSC 307(88) Annex 1 part 8 MED Certificate IMO IMO MSC 307(88) Annex 1 part 8 UK MED Certificate IMO UK CA TB 117-2013 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals..		
Environment	OEKO-TEX® STANDARD 100 EU Ecolabel		



Gabriel Cura features

The Cura fabric cover is characterized by a warm, casual aesthetic that is complemented by a lively melange effect and a soft, voluminous texture.

But this material is not only visually appealing - its high stretchability enables flexible use, making it perfect for office and lounge furniture. But what makes this material special is its sustainability. As much as 98% of the material is made from recycled post-consumer polyester, which makes a significant contribution to reducing waste. In addition, the entire material is 100% recyclable and therefore contributes to a closed-loop economy.

But this material also scores highly in terms of ecological standards. The EU Ecolabel shows that it meets strict environmental criteria and is therefore an environmentally friendly choice. It also fulfills meets the requirements of STANDARD 100 by OEKO-TEX®, which means that it has been tested for possible harmful substances and is considered safe for human use.

Cura-Specifications

Design no.	2480/2544		
Composition	100% post-consumer recycled polyester		
Weight	g/lm 420 oz/lin.yd 55		
Width	cm 140 inches 55		
Abrasion	rubs Martindale (EN ISO 12947-2) 100.000 Double Rubs Wyzenbeek (ASTM D4157-07) (heavy duty upholstery) 100.000 ASTM D4157-07 Wyz-abrasion (heavy duty) 100k pass Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan		
Pilling	scale 1-5, max. 5 - EN ISO 12945-2 ASTM D3511 Pilling pass	4-5	
Light fastness	scale 1-8, max. 8 - EN ISO 105-B02 AATCC 16 Light fastness pass	5-8	
Rubbing fastness	scale 1-5, max. 5 - EN ISO 105x12 (dry/wet) AATCC 8 oder 116 Dry/wet crocking	4-5/4-5 pass	
Care instructions	wash or dry cleaning P(W) Cura is made of polyester which is a material suited for environments with special requirements for cleaning.  40°C shrinkage max. 1%.  60°C shrinkage max. 2%.		
Flammability	BS EN 1021 1&2 Cigarette and Match CA TB 117-2013 ASTM E 84 Class 1 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.		

Gabriel Comfort features

The high-quality fabric was specially developed for intensive use and has outstanding properties. With an impressive Martindale value of 150,000, it is extremely hard-wearing and resistant to abrasion.

Thanks to the use of carbon fibers, the fabric is permanently antistatic, which means that it hardly collects any dust and is therefore particularly easy to clean.Furthermore it is dirt-repellent and water and oil repellent, making it extremely resistant to soiling.

Another plus is its openness to diffusion, which means that the fabric enables excellent air and moisture exchange and thus counteracts the formation of mold.



Safety is a top priority with this fabric, as it is permanently fire-resistant - a property achieved by fire-retardant fibers. It therefore offers a high level of safety and protection.

For the environmentally conscious buyer, it is important to know that this fabric contains 37% recycled fibers, whichcontributes to the sustainable use ofresources.

And to top it all off, the fabric manufacturer offers a generous 10- year guarantee against abrasion and pilling, which further reinforces confidence in the quality of this product.

The fabric also meets the requirements of the renowned STANDARD 100 by OEKO-TEX®, which means that it has been tested for harmful substances and is considered safe for human use.

Comfort-Specifications


Design no.	8580		
Composition	51% polyester/37% post-consumer rec.pes./ 12% polyurethane incl. antistatic fibers and fire retardant fibers in the backside		
Weight	g/lm 385 oz/lin.yd 12.42		
Width	cm 140 inches 55		
Abrasion	rubs martindale (EN ISO 12947-2) 150.000 Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan		
Pilling	scale 1-5, max. 5 - EN ISO 12945-2	5	
Light fastness	scale 1-8, max. 8 - EN ISO 105-B02	5-7	
Rubbing fastness	scale 1-5, max. 5 - EN ISO 105x12 (dry/wet)	4/4-5	
Care instructions	wash or dry cleaning P(W) most stains can be removed by brushing with a suede brush or using an eraser. or use a solution of luke-warm water and a neutral detergent. 74°C shrinkage max. 2,5%.  60°C shrinkage max. 2%. 		

Flammability	BS EN 1021 1&2 Cigarette and Match BS EN 1021-1 Cigarette ÖNORM A3800-B2-B3825-Q1 UK NF P 92-503 M3 CA TB 117-2013 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.		
Environment	OEKO-TEX® STANDARD 100		

Gabriel Runner features

The Gabriel Runner fabric not only gives seating furniture an inviting and fascinating surface, but its colour palette also opens up a wide range of possible uses in the working environment and at home. Its design exudes comfort, elegance and robustness and can be perfectly combined with other Gabriel fabrics. 100% made from recyclable polyester, including 20% post-consumer recycled polyester, this fabric not only fulfils the demanding furniture facta requirements, but also proudly bears the EU Ecolabel and STANDARD 100 certification from OEKO-TEX®.

Runner-Specifications

Design no.	8705		
Composition	80% polyester / 20% post-consumer recycled poly-ester		
Weight	g/lm 510 oz/lin.yd 16.45		
Width	cm 160 inches 63		
Abrasion	rubs martindale (EN ISO 12947-2)70,000 double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery) 100,000 ASTM D4157-07 Wyz abrasion (heavy duty)pass Abrasion test results exceeding ACT Performance Gui-delines are not an indicator of product lifespan		
Pilling	scale 1-5, max. 5 – EN ISO 12945-2 ASTM D3511 Pilling	pass	5
Light fastness	scale 1-8, max. 8 – EN ISO 105-B02 AATCC 16 Lichtechtheit	pass	5-7
Rubbing fastness	scale 1-5, max. 5 – EN ISO 105x12 (dry/wet) AATCC 8 oder 116 Nass-/Trocken-Crocking	pass	4-5/4-5
Care instructions	wash or dry cleaning P(W). Runner is made of polyester which is a material suited for environments with special requirements for clea-ning.  40°C shrinkage max. 5%.		
Flammability	CA TB 117-2013 BS EN 1021-1 Cigarette BS EN 1021 1&2 Cigarette and Match Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.		
Environment	OEKO-TEX® STANDARD 100 EU Ecolabel Cradle to Cradle Certified® Bronze		

Heller-Leder Atlantic features

The ideal upholstery for the office - Atlantic leather not only impresses with its high quality and beautiful surface embossing, but also offers optimum seating comfort. The soft leather is easy to care for, breathable and is characterised by its antistatic properties.

Atlantic-Specifications

Test	Test Method	Measurement Unit	Guaranteed
Tear strength – Single edge tear	UNI EN ISO 3377-1	N	> = 20
Colour fastness to rubbing – Dry 500 Cycles	UNI EN ISO 11640:1998	Grey Scale	> = 4
Colour fastness to rubbing – Wet 250 Cycles	UNI EN ISO 11640:1998	Grey Scale	> = 4
Colour fastness to rubbing – Sweat 80 Cycles	UNI EN ISO 11640:1998 ISO 11641 pH8	Grey Scale	> = 4
Flexing endurance – Dry 50.000 Cycles	UNI EN ISO 5402		No damage
Finish Adhesion – Dry	UNI EN ISO 11644	N/cm	> = 2
Colour fastness to artificial light – Exposition energy 16.000kj/sqm	UNI EN ISO 105 B02 (MET.5)	Blue Scale	> = 5
Smolder resistance, cigarette and match flame	CAL TB-117 (2013, Sec. 1) BS 5852: 1979, source O-1 BS EN 1021-1-2:2006		Pass

Elastron Uruguay features

The ideal cover for easy cleaning - the Uruguay faux leather impresses with a beautiful and even surface embossing and has a very good grip. The black faux leather cover makes this model a robust companion for many years.

Uruguay-Specifications

Composition	Upper fabric: 100 % Polyurethane Underfabric: 80 % Polyester + 20 % Cotton
Weight	g/lm 600 (+/-5%)
Thickness	1,0 mm (+/-5%)
Tensile strength	EN ISO 1421 Warp: 774 N l 21,0% Weft: 618 N l 24,9%
Tear growth resistance	EN ISO 4674-1 Warp: 123,6 N Weft: 91,0 N
Seam Slippage resistance	EN ISO 13936-2 Warp: Kette: 3,0 mm Weft: 3,0 mm
Abrasion Test	EN ISO 5470-2 > 100.000
Colour Fastness	EN ISO 105 – BO2
Reibechtheit	EN ISO 105 – X12 l Dry 5 l Wet 5
Permanent Creasing Behavior	DIN EN ISO 32100/DIN 53359 – 30.000 cycles PASS
Flammability	Fire Proof Norms BS 5852 Part 1 – Cigarette Test – PASS EN 1021-1 – Cigarette Test – PASS CA Tech. Bull. 117:2013 / NFPA 260 – Cigarette Test – PASS

Environment	OEKO-TEX® STANDARD 100 EU Ecolabel Cradle to Cradle Certified® Bronze
-------------	---

Capture, Select, Luna / Gabriel

Gabriel A/S
Hjulmagervej 55
9000 Aalborg, DENMARK

DTI TEKSTIL
TEKNOLOGISK INSTITUT
GREGERSENSVEJ
2630 TAASTRUP, DENMARK

Certificate

OEKO-TEX® STANDARD 100

Gabriel A/S

is granted the OEKO-TEX® STANDARD 100 certification
and the right to use the trademark.

SCOPE
Piece dyed, yarn dyed and fiber dyed upholstery and screen fabrics woven and non-woven of 100% wool, wool/polyamide 95-80/5-20%, wool/polyamide/anti-static fibres 93-94/4-5/2%, wool/linen/polyamide 58/35/7%, wool/polyester/cotton 38-86/11-40/7-22%, wool/polyester/polyamide 48-54/43-44/2-9%, wool/polyester 84/16%, wool/cotton 80/20%, cotton/polyester 80-86/14-20%; des. Luna Fleur WO/PA 90/10% with all-over embroidery.

STANDARD 100 1076-17401 DTI

This certificate 1076-17401 is valid until 30.06.2024.

SUPPORTING DOCUMENTS
✓ Test report : 174-48
✓ Declaration of conformity in accordance with EN ISO 17050-1 as required by OEKO-TEX®
✓ OEKO-TEX® Terms of Use (ToU)

Anette Werner
Senior Consultant Textiles

Allan Jensen
Consultant

Further compliance information (REACH, SVHC, POP, GB18401 etc.) can be found on oeko-tex.com/en/faq.
The certificate is based on the test methods and requirements of the OEKO-TEX® STANDARD 100 that were in force at the time of evaluation.

Taastrup, 2023-05-30

OEKO-TEX Service GmbH Genferstrasse 23, CH-8002 Zurich

Cura / Gabriel

Gabriel A/S
Hjultagevej 55
9000 Aalborg, DENMARK



DTI TEKSTIL
TEKNOLOGISK INSTITUT
GREGERSENSVEJ
2630 TAASTRUP, DENMARK

Certificate

OEKO-TEX® STANDARD 100

Gabriel A/S
is granted the OEKO-TEX® STANDARD 100 certification
and the right to use the trademark.

SCOPE
Woven and knitted upholstery fabrics of 100% polyester.; Woven des. Event, Event Screen+, Step, Step Screen, Step Melange, Step Melange Screen, Twist, Twist Melange, Go Check, Go Uni, Go Couture, Spin & Contour. Knitted des. Atlantic, Flex, Sync, Sync EU, Athlon & Athlon Plus; upholstery fabrics Step, Step Screen, Step Melange, Step Melange Screen, Twist, Twist Melange, Go Check, Go Uni, Go Couture, Spin & Sync EU are made of yarns with flame retardant properties accepted by OEKO-TEX®

PRODUCT CLASS
II (products with direct contact to skin) - Annex 4



STANDARD 100 876-13601 DTI

This certificate 876-13601 is valid until 31.08.2024.

SUPPORTING DOCUMENTS
✓ Test report : 136-51
✓ Declaration of conformity in accordance with EN ISO 17050-1 as required by OEKO-TEX®
✓ OEKO-TEX® Terms of Use (ToU)



Anette Werner
Senior Consultant Textiles



Maria Rahbek Pedersen
Consultant

Further compliance information (REACH, SVHC, POP, GB18401 etc.) can be found on oeko-tex.com/en/faq.
The certificate is based on the test methods and requirements of the OEKO-TEX® STANDARD 100 that were in force at the time of evaluation.

Taastrup, 2023-08-14



OEKO-TEX Service GmbH Genferstrasse 23, CH-8002 Zurich

Comfort / Gabriel

Gabriel A/S
Hjultagevej 55
9000 Aalborg, DÄNEMARK



DTI TEKSTIL
TEKNOLOGISK INSTITUT
GREGERSENSVEJ
2630 TAASTRUP, DÄNEMARK

Certificate

OEKO-TEX® STANDARD 100

Gabriel A/S
erhält die OEKO-TEX® STANDARD 100 Zertifizierung
und das Recht zur Nutzung der Marke.

SCOPE
Möbelbezugsstoff Artikel Comfort+ aus 88/12% Polyester/Polyurethan in mehreren Farben, mit anti-statische und flammhemmende Fasern (von OEKO-TEX® akzeptiert) auf der Rückseite und Antischmutzausrüstung auf der Vorderseite.

PRODUKTKLASSE
IV (Ausstattungsmaterialien) - Annex 4



STANDARD 100 6234-4401 DTI Dänemark

Dieses Zertifikat 6234-4401 ist gültig bis 31.01.2024.

BEGLEITDOKUMENTE
✓ Testbericht : 44-31
✓ Konformitätserklärung gemäß EN ISO 17050-1 wie von OEKO-TEX® gefordert.
✓ OEKO-TEX® Allgemeine Nutzungsbedingungen (ANB)



Anette Werner
Senior Consultant Textiles


Weitere Compliance-Informationen (REACH, SVHC, POP, GB18401 etc.) finden Sie hier: oeko-tex.com/en/faq.
Das Zertifikat basiert auf den zum Zeitpunkt der Zertifizierung gültigen Prüfmethoden und Anforderungen des OEKO-TEX® STANDARD 100.

Taastrup, 2023-01-24



OEKO-TEX Service GmbH Genferstrasse 23, CH-8002 Zurich

Never just sit.

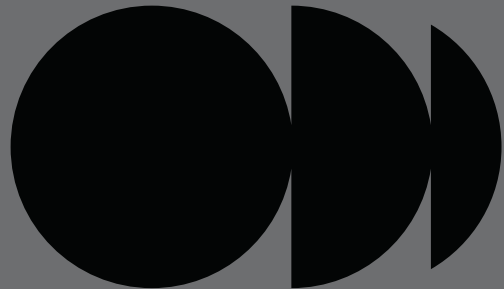

Aeris GmbH
Hans-Stießberger-Straße 2a
85540 Haar
Germany

Tel.: +49 (0) 89 - 900506 - 0
info@aeris.de
www.aeris.de